

# H2L Series Installation Guide

## Safety Information

- To reduce the risk of personal injury or property damage from fire, electric shock, and other hazards read all warnings and instructions first.
- To be installed by qualified electrician only.
- Install the product with power disconnected at the circuit breaker. Hot plugging could cause damage and is not covered by the warranty.
- The product is to be installed in a manner consistent with the intended use and in compliance with the NEC codes and local codes.
- DO NOT INSTALL DAMAGED PRODUCT!

## Warning

### RISK OF ELECTRICAL SHOCK

- Turn off electrical power at fuse or circuit breaker box before wiring fixture to the power supply or perform any maintenance.
- VERIFY the correct supply voltage by comparing it with the luminaire label.
- Make all electrical and grounded connections in accordance with the National Electrical Code and local code requirements.
- All wiring connections should be capped with UL approved wire connectors.

### RISK OF INJURY

- Wear gloves and safety glasses when working with luminaire and performing maintenance.
- Avoid direct eye exposure to the light source when it is on.

### RISK OF FIRE

- Keep combustible materials away from luminaire.


## Package Contents

- Luminaire
- Product installation manual
- Cable ties



# Installation

- Mount fixture U bracket to a sturdy wall or ceiling structure. (Suggested 22 ft-pd and use two washers .
- Connect power cord to supply wires inside a listed liquid tight junction box using approved wire connectors.
- This fixture is to be intended to be connected to a properly installed and grounded UL Listed watertight j-box.
- Secure the power cord away from the mounting yoke and luminaire surface with supplied cable ties.
- Adjust luminaire angle if necessary. (See suggested torque below)
- Secure the safety cable to wall or ceiling structure

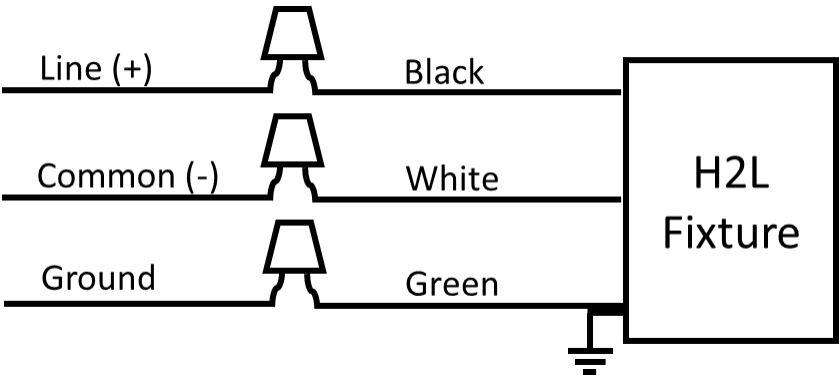

# Fixture Dimension

